


ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

The ENTRA 3" Remodel Adjustable Downlight presents a cost-effective alternative for delivering architectural-grade aesthetics and quality to remodel applications, meeting budget-sensitive residential and commercial specifications. Custom-engineered for high performance and reliability, ENTRA 3" offers a complete feature set providing flexibility without overwhelming options. The ENTRA 3" Remodel Adjustable Downlight offers LED options with Static White and Warm Dim.

- SDCM: 2-step static white and warm dim
- Hot aiming (0-30° tilt + 359° rotation)
- Interchangeable optics: 20°, 40°, 65° (all included)
- Flanged/flangeless die-cast Bevel and Flat trims

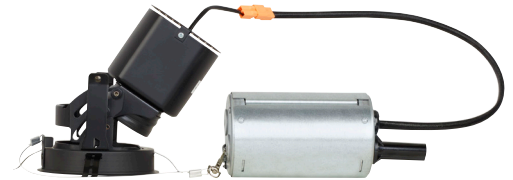

3" REMODEL ADJUSTABLE

LUMEN MULTIPLIER (CRI/CCT)

CCT	90 CRI MULTIPLIER
2700K	0.92
3000K	1.00
3500K	1.03
4000K	1.07

SPECIFICATIONS

	STATIC WHITE		WARM DIM	
	HIGH OUTPUT	LOW OUTPUT	HIGH OUTPUT	LOW OUTPUT
DELIVERED LUMENS	1165	856	981	721
WATTS	15	11	15	11
EFFICACY	78	78	66	66
CRI	90			
CBCP (AT 3000K)	20° - 4,213 40° - 2,327 65° - 1,244			
CCT	2700K, 3000K, 3500K, or 4000K		3000K - 1800K	
COLOR CONSISTENCY	2-step			
VOLTAGE	Universal 120V or 277V			
DIMMING ¹	Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming down to 1%			
POWER SUPPLY	Constant current driver with +.9 power factor and >87% efficiency			
OPTICS	20°, 40°, 65° (all included); accepts 2 optical media			
ADJUSTABILITY	0-30° tilt, 359° rotation			
CEILING APPEARANCE	Flanged or flangeless			
CEILING THICKNESS	Flanged or flangeless: 1/2" to 1"			
CEILING APERTURE	4" ceiling cutout			
HOUSING	Non-IC			
CONSTRUCTION	Trim: Die-cast aluminum			
FINISH	Housing: Black powder coat Trim: Black or White (paintable)			
GENERAL LISTINGS	ETL Listed. Damp Location. Shower version Wet Listed.			
L70	50,000 hours min			
WARRANTY ²	5 years			

Data in chart reflect 3000K/90 CRI values unless noted.

Ordering grids available on page 2.

Accepts two optical controls and an optional trim-mounted lens.

¹See visualcomfort.com for dimmer compatibility.

²Visit visualcomfort.com for specific warranty limitations and details.

ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

ORDERING GRIDS

HOUSING

PRODUCT	LAMP	CRI	TEMPERATURE	BEAM	FUNCTION	HOUSING RATING	VOLTAGE
EN3RR ENTRA 3" ROUND REMODEL	-LH HIGH OUTPUT	9 90 CRI	27 2700K, 2-STEP STATIC WHITE	A 20° - 40° - 65° ¹	A ADJUSTABLE ²	N NON-IC	120 VOLT (LEAVE BLANK)
EN3SR ENTRA 3" SQUARE REMODEL	-LO LOW OUTPUT		30 3000K, 2-STEP STATIC WHITE				-277 277 VOLT
			35 3500K, 2-STEP STATIC WHITE				
			40 4000K, 2-STEP STATIC WHITE				
			WD WARM DIM (3000K-1800K), 2-STEP				
	-	9		A	A	N	

Includes an LED driver with universal input 120V-277V, dimmable by reverse-phase, forward-phase, TRIAC, or 0-10V controls. 277V is only compatible with 0-10V dimming.

Housing ships with plaster plate for use on flangeless installation. Do not use plate for flanged installs.

Trims are required and must be ordered separately.

¹A - LED module ships with 40° optic installed. Includes 20° and 65° optics as well.

²A - Use with 40° optic and adjust to 30° tilt for wall wash.

TRIM

PRODUCT	CEILING APPEARANCE	STYLE	APERTURE	FINISH
EN3R ENTRA 3" ROUND	L FLANGELESS	B BEVEL	-O NO LENS	B BLACK
EN3S ENTRA 3" SQUARE	L15 FLANGELESS 1" - 1.5" CEILING THICKNESS	F FLAT	-S SHOWER (SOLITE LENS) ²	W WHITE (PAINTABLE)
	F FLANGED 0.5" - 0.75" CEILING THICKNESS	W WALL WASH ¹	-W WALL WASH (LENSED) ¹	
	F1 FLANGED 0.75" - 1" CEILING THICKNESS			
	F15 FLANGED 1" - 1.5" CEILING THICKNESS			
			-	

¹W - Wall wash style trim can only be used with wall wash lensed aperture (-W).

²S - Shower Solite lens aperture requires bevel trim (B). Shower lens includes a gasket.

LENSES/LOUVERS¹

PRODUCT	
140MR16SF	SOLITE SOFT FOCUS LENS
140MR16SB	SANDBLASTED LENS
140MR16LL	LINEAR SPREAD LENS
140MR16DF	DIFFUSER SPREAD LENS
140MR16GL	CLEAR GLASS LENS
700A02-BK	EGGCRATE/HEXCELL LOUVER

¹For additional lenses, louvers, optical controls and accessories, reference visualcomfort.com. Lens/louvers mounted to lamp assembly only (max 2).




ENTRA™ 3" LED


REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

TRIMS

FLANGED



ROUND BEVEL




SQUARE BEVEL

FLANGELESS



ROUND BEVEL



SQUARE BEVEL


FINISH




BLACK




WHITE (PAINTABLE)




ROUND FLAT




SQUARE FLAT




ROUND FLAT



SQUARE FLAT



ROUND WALL WASH



SQUARE WALL WASH




ROUND WALL WASH



SQUARE WALL WASH


MECHANISM

ROUND

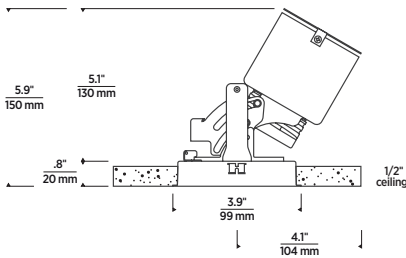

SHOWN AT FULL TILT (30°)
SHOW WITH SHORT COLLAR:
ACCOMMODATES 1/2" - 5/8" CEILING HEIGHTS

SQUARE

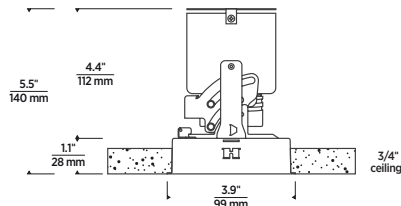

SHOWN AT NO TILT (0°)
SHOW WITH TALL COLLAR:
ACCOMMODATES 3/4" - 1" CEILING HEIGHTS

SHIPS WITH A SHORT COLLAR AND A TALL COLLAR TO ACCOMMODATE DIFFERENT CEILING HEIGHTS




ENTRA™ 3" LED


REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

PLASTER PLATES

DIE CAST




ROUND DIE CAST
(INCLUDED FOR FLANGELESS INSTALLATION)



SQUARE DIE CAST
(INCLUDED FOR FLANGELESS INSTALLATION)

DRIVER

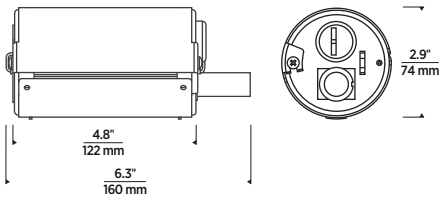


ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH


WALL WASH PERFORMANCE

2' FROM WALL

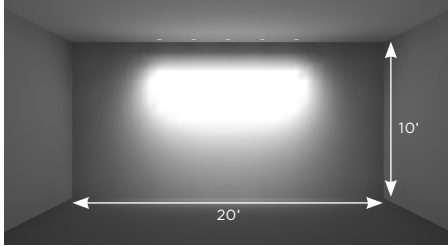


2' ON CENTER, 5 FIXTURES

2.5' FROM WALL

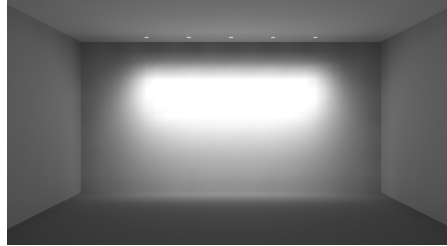

2.5' ON CENTER, 5 FIXTURES

3' FROM WALL

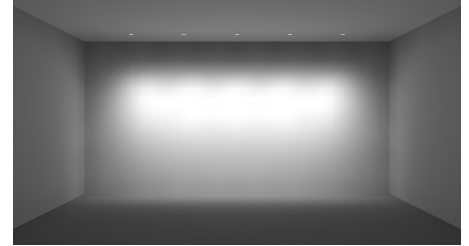

3' ON CENTER, 5 FIXTURES

FOOT-CANDLES ON WALL FROM MULTIPLE FIXTURES

HEIGHT ON WALL	2' FROM WALL					
	┌-2'-┐ on center		┌-2.5'-┐ on center		┌-3'-┐ on center	
10'	0.4	0.8	0.4	0.5	0.8	0.5
9'	28.9	33.3	28.9	28.5	25.8	28.5
8'	63.1	71.6	63.1	63.5	54.1	63.5
7'	48.7	55.8	48.7	46.5	46.3	46.5
6'	29.9	32.7	29.9	27.7	28.5	27.7
5'	18.2	18.6	18.2	16.5	16.7	16.5
4'	10.9	10.7	10.9	10.0	9.9	10.0
3'	6.8	6.3	6.8	6.2	6.0	6.2
2'	4.5	3.9	4.5	4.1	3.8	4.1
1'	3.0	2.5	3.0	2.7	2.5	2.7

HEIGHT ON WALL	2.5' FROM WALL					
	┌-2'-┐ on center		┌-2.5'-┐ on center		┌-3'-┐ on center	
10'	0.3	0.3	0.3	0.3	0.3	0.3
9'	10.3	12.9	10.3	9.4	11.5	9.4
8'	37.8	47.9	37.8	38.0	38.9	38.0
7'	45.0	54.0	45.0	42.6	45.8	42.6
6'	33.7	38.1	33.7	32.0	34.1	32.0
5'	23.0	24.2	23.0	21.5	22.2	21.5
4'	15.1	15.1	15.1	14.2	14.1	14.2
3'	9.8	9.4	9.8	9.2	9.0	9.2
2'	6.5	6.0	6.5	6.1	5.8	6.1
1'	4.5	4.0	4.5	4.2	3.9	4.2

HEIGHT ON WALL	3' FROM WALL					
	┌-2'-┐ on center		┌-2.5'-┐ on center		┌-3'-┐ on center	
10'	0.2	0.2	0.2	0.2	0.2	0.2
9'	4.1	5.8	4.1	3.7	5.7	3.7
8'	21.2	27.6	21.2	20.5	23.6	20.5
7'	33.6	41.3	33.6	32.5	36.2	32.5
6'	33.0	38.1	33.0	31.6	34.7	31.6
5'	25.2	27.1	25.2	23.8	25.1	23.8
4'	18.1	18.3	18.1	17.0	17.2	17.0
3'	12.4	12.2	12.4	11.8	11.7	11.8
2'	8.6	8.2	8.6	8.1	7.9	8.1
1'	6.0	5.5	6.0	5.7	5.4	5.7



ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

PHOTOMETRICS

Description: ENTRA 3" LED
20° Beam, 0° Tilt
90 CRI, 3000K
High Output

Input Power (Watts): 14.7
Input Power Factor: 0.99
Absolute Luminous Flux (Lumens): 1081
Lumen Efficacy (Lumens per Watt): 73.5

Description: ENTRA 3" LED
40° Beam, 0° Tilt
90 CRI, 3000K
High Output

Input Power (Watts): 14.7
Input Power Factor: 0.99
Absolute Luminous Flux (Lumens): 1165
Lumen Efficacy (Lumens per Watt): 79.3







Description: ENTRA 3" LED
65° Beam, 0° Tilt
90 CRI, 3000K
High Output

Input Power (Watts): 14.7
Input Power Factor: 0.99
Absolute Luminous Flux (Lumens): 1142
Lumen Efficacy (Lumens per Watt): 77.7

ANGLE	0°	45°	90°
0°	4110	4110	4110
5°	3643	3217	3758
10°	2436	2229	2533
15°	1446	1393	1508
20°	845	817	846
25°	472	465	469
30°	242	253	252
35°	116	138	129
40°	59	77	64
45°	33	42	31
50°	19	23	17
55°	11	13	11
60°	6	7	6
65°	4	4	4
70°	3	3	3
75°	3	3	2
80°	2	2	1
85°	1	2	1
90°	1	1	1

ANGLE	0°	45°	90°
0°	2322	2322	2322
5°	2193	2232	2222
10°	1885	1940	1928
15°	1468	1497	1520
20°	1023	1038	1068
25°	648	664	675
30°	383	407	387
35°	218	244	210
40°	121	145	117
45°	66	83	62
50°	37	44	35
55°	21	24	20
60°	10	14	9
65°	4	7	3
70°	3	4	3
75°	2	2	2
80°	2	2	2
85°	1	1	1
90°	1	1	1

ANGLE	0°	45°	90°
0°	1237	1237	1237
5°	1220	1218	1212
10°	1146	1130	1120
15°	1025	1005	988
20°	872	849	833
25°	710	692	670
30°	543	534	507
35°	382	390	356
40°	246	262	239
45°	149	164	152
50°	85	96	92
55°	36	53	47
60°	12	26	18
65°	3	13	4
70°	3	4	3
75°	3	3	2
80°	2	2	2
85°	2	1	2
90°	2	1	1



ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

PROJECT INFORMATION

JOB NAME AND INFORMATION

FIXTURE TYPE AND QUANTITY

NOTES
