

The ELEMENT Merge 1.5 Flush LED linear system represents the marriage of an indirect linear system, with a track system; all in one system with independent control and outputs for optimal illumination and power conservation. With varying length components, Merge 1.5 Flush can be configured up to a continuous 80' run from a single feed. A 90° connector is also available for illuminated same plane turns. Merge Gimbal or Drop Down Spots, or Tech Lighting low-voltage heads or pendants (using the FreeJack adapter) can be placed anywhere along the concealed low-voltage bus system for added versatility. (Note: At this time, Flush Mount version not compatible with T-Grid ceilings. Please consult factory.)

## Key features

- Indirect linear general illumination system with integrated low-voltage track
- Illuminated same plane turns with a 90° connector
- 2', 4', 6', 8' gangable lengths
- FreeJack adapter allows the use of any low-voltage Tech Lighting heads or pendants

## SPECIFICATIONS

DELIVERED LUMENS	Downlight: 650 lms/ft or 450 lms/ft
WATTS	Downlight: 12 watts/ft or 7 watts/ft
EFFICACY	54 or 64 l/w
CRI	80+ or 90+
CCT OPTIONS	2700K, 3000K, 3500K or Warm Color Dimming (3000K-2000K)
VOLTAGE	120V or 277V
DIMMING	ELV, 0-10V, Lutron Hi-Lume 2 Wire PWM (120V only) or Lutron Hi-Lume Eco System, 0-10V 1%, 0-10V 0.1%
TRANSITIONS	90° "L" horizontal turns
CEILING APPEARANCE	Flush Mount***
POWER SUPPLY*	Constant Current (Each linear channel includes a self-contained ELV, 0-10V, Lutron Hi-Lume 2 Wire PWM (120V only) or Lutron Hi-Lume, Eco System Fade-to-Black Driver)
CONSTRUCTION	Aluminum
HARDWARE	Steel
FINISH	White Powder Coat
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Can be used to comply with CEC 2016 Title 24 Part 6 (Static White, 90 CRI versions).
LED LIFETIME	L70; 50,000 hours
WARRANTY*	5 years

\*Visit ELEMENT-lighting.com for specific warranty limitations and details.

\*\*Consult Quotes Department for additional driver options.

\*\*\*At this time, Flush Mount version not compatible with T-Grid ceilings. Please consult factory.

Concealed 10 gauge, low-voltage bus bar, order 12-volt remote transformer separately. Max run length is 80' for the channel; typical max run length is 40' for the low-voltage bus which can be powered from both sides for a total of 80'; system wattage will impact max run length.



MERGE  
shown flush mounted

## PERFORMANCE

### DOWNLIGHT (650 LPF)

LINEAR CHANNEL	FIXTURE OUTPUT (LMS)*	WATTAGE
2 FT	1300	24
4 FT	2600	48
6 FT	3900	72
8 FT	5200	96

\*REPRESENTS 3500K/80CRI

### DOWNLIGHT (450 LPF)



LINEAR CHANNEL	FIXTURE OUTPUT (LMS)*	WATTAGE
2 FT	900	14
4 FT	1800	28
6 FT	2700	42
8 FT	3600	56

\*REPRESENTS 3500K/80CRI



## Optional

- **EM:** integrated emergency battery back-up to provide illumination when main power is lost. EM battery is integrated in the Merge linear channel housing and provides 90 minutes of egress illumination. Each EM fixture ships with a mounted test switch/indicator light.
  - 2' EM linear channel: 978 total lumens
  - 4', 6', & 8' EM linear channel: 1018 total lumens (illuminates 4' section of the 8' channel)

## HOUSING

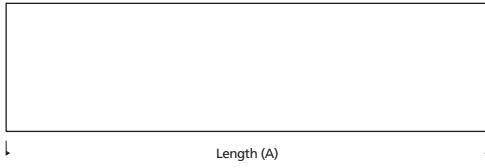

LINEAR  
flush top view

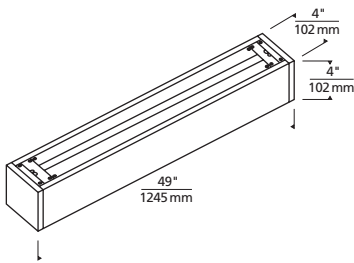


## DIMENSIONS

	LENGTH (A)
2' INDIVIDUAL	24"
4' INDIVIDUAL	48"
6' INDIVIDUAL	72"
8' INDIVIDUAL	96"

Please note that end caps will add 1" to overall length of the fixture

## END CAPS

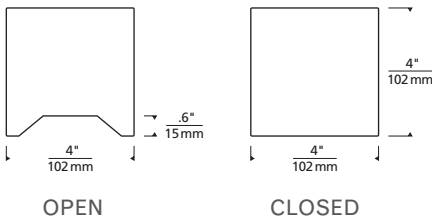

## GRIDS

SYSTEM	NOMINAL LENGTH	CRI / COLOR TEMPERATURE	FINISH	CONTROLS	OPTIONAL
FLS1	2 FT	<b>H835</b> HIGH OUTPUT, 80 CRI, 3500K	<b>W</b> MATTE WHITE	<b>ELV0</b> ELV/0-10V DIMMING UNV*	<b>EM</b> LEAVE BLANK IF NO DESIRED OPTIONS EMERGENCY BATTERY‡
	4 FT	<b>H927</b> HIGH OUTPUT, 90 CRI, 2700K		<b>ELD0</b> ELDOLED 0.1% 0-10V LINEAR UNV*	
	6 FT	<b>H930</b> HIGH OUTPUT, 90 CRI, 3000K		<b>ELD0A</b> ELDOLED 0.1% 0-10V LOGARITHMIC UNV*	
	8 FT	<b>H935</b> HIGH OUTPUT, 90 CRI, 3500K		<b>ELD1</b> ELDOLED 1% 0-10V LINEAR UNV*	
		<b>H9WD</b> HIGH OUTPUT, 90 CRI, WARM DIM/3000-2700K		<b>ELD1A</b> ELDOLED 1% 0-10V LOGARITHMIC UNV*	
		<b>S835</b> STANDARD OUTPUT, 80 CRI, 3500K		<b>HL2W</b> LUTRON HI-LUME 1% 2 WIRE/PWM**	
		<b>S927</b> STANDARD OUTPUT, 90 CRI, 2700K		<b>HLECO</b> LUTRON HI-LUME 1% ECO-SYSTEM FADE-TO-BLACK UNV*	
		<b>S930</b> STANDARD OUTPUT, 90 CRI, 3000K			
		<b>S935</b> STANDARD OUTPUT, 90 CRI, 3500K			
		<b>S9WD</b> STANDARD OUTPUT, 90 CRI, WARM DIM/3000-2000K			

\*UNV = 120V/277V INPUT VOLTAGE. \*\*HL2W – TWO WIRE LOW-VOLTAGE ELECTRONIC DIMMING, 120 VOLT ONLY. ‡EM ONLY AVAILABLE ON STATIC WHITE LINEAR CHANNELS (NO 9WD).

## TRANSFORMERS\*

(ORDERED SEPARATELY, WHEN POWERING LOW-VOLTAGE TRACK)

ITEM	DESCRIPTION	DIMMING
<b>700AT060EL</b>	ELECTRONIC, 60W, 120V	ELV
<b>700AT152EL</b>	ELECTRONIC, 150W, 120V	ELV
<b>700AT152ELD010</b>	ELECTRONIC, 150W, 120V	0-10V
<b>700AT150T</b>	MAGNETIC, 150W, 120V	MAGNETIC
<b>700AT150T277</b>	MAGNETIC, 150W, 277V	MAGNETIC
<b>700AT302EL</b>	ELECTRONIC, 300W, 120V	ELV
<b>700AT300T</b>	MAGNETIC, 300W, 120V	MAGNETIC
<b>700AT300T277</b>	MAGNETIC, 300W, 277V	MAGNETIC

DO NOT LOAD TRANSFORMER ABOVE 70% OF RATED LOAD DUE TO IN-RUSH CURRENT. \*CONSULT SPEC SHEETS FOR DIMENSIONS.

## FINISHING KIT

SYSTEM	TYPE	STYLE	FINISH
FLS1	FK FINISHING KIT	1 CLOSED ENDCAPS	<b>W</b> MATTE WHITE
		2 OPEN ENDCAPS	
<b>FLS1</b>	<b>FK</b>		<b>W</b>

INCLUDES 2 ENDCAPS.

## PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES

**ELEMENT**  
by Tech Lighting†

GENERATION BRANDS  
7400 Linder Avenue, Skokie, Illinois 60077  
T 847.410.4400 F 847.410.4500



© 2018 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.



## PHOTOMETRICS: MERGE FLUSH MOUNT

DESCRIPTION: Merge Suspended Direct LED High  
4' Linear Channel, 70 CRI, 3000K

MODEL: SLS14SA04H0930W

INPUT POWER (WATTS): 47.5  
 INPUT POWER FACTOR: 0.98  
 ABSOLUTE LUMINOUS FLUX (LUMENS): 2731  
 LUMEN EFFICACY (LUMENS PER WATT): 57.4

ANGLE	0°	45°	90°
0°	859	859	859
5°	842	854	878
10°	833	847	871
15°	820	834	859
20°	801	816	842
25°	775	793	820
30°	744	765	793
35°	706	731	757
40°	664	690	717
45°	617	644	668
50°	564	591	593
55°	506	531	508
60°	443	448	415
65°	373	357	290
70°	297	251	140
75°	217	112	37
80°	139	23	22
85°	66	10	10
90°	3	1	1

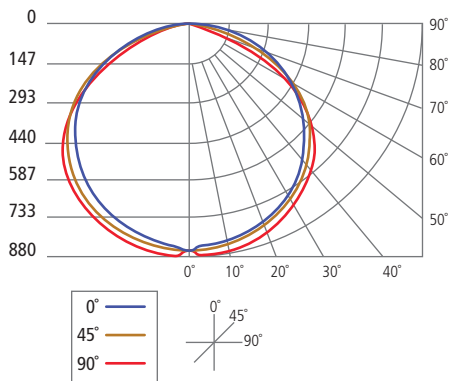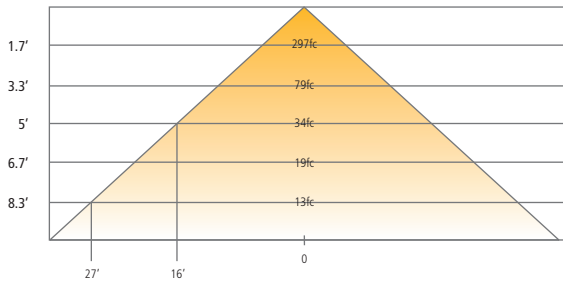

DESCRIPTION: Merge Suspended Direct LED Standard  
4' Linear Channel, 90 CRI, 3000K

MODEL: SLS14SA04S0930W

INPUT POWER (WATTS): 28.9  
 INPUT POWER FACTOR: 0.98  
 ABSOLUTE LUMINOUS FLUX (LUMENS): 1782  
 LUMEN EFFICACY (LUMENS PER WATT): 61.7

ANGLE	0°	45°	90°
0°	560	560	560
5°	550	556	572
10°	544	551	567
15°	535	543	559
20°	523	532	549
25°	507	517	534
30°	486	498	517
35°	462	476	494
40°	433	451	468
45°	402	420	436
50°	369	386	388
55°	331	348	333
60°	289	294	271
65°	245	235	189
70°	196	164	93
75°	144	75	27
80°	93	16	14
85°	45	6	6
90°	2	1	1

