

REFLECTIONS

INDIRECT DOWNLIGHT - NEW CONSTRUCTION

Innovative, first-of-its-kind technology in architectural downlights, Reflections combines decorative recessed domes with beautifully controlled, reduced-glare indirect LED illumination. Reflections domes (available in 5", 8" and 12" diameters) are recessed into the ceiling plane and act as reflectors to a completely hidden ring of up-firing LEDs.

The decorative domes: Bloom, Dune, Fleur and Torus consist of beautiful molded geometry for dramatic visual interest with the subtle contrast of light and shadow. The smooth Skye dome creates soft, low-glare general illumination with a peaceful visual aesthetic.

Reflections offers two ceiling appearance options: Flanged for a more traditional ceiling appearance and a field-paintable flange ring, or flangeless for a smooth, mudded-in ceiling appearance.

Pristine design and illumination:

- Reduced glare, indirect illumination (dimnable for enhanced mood-setting options)
- Three aperture options: 5", 8" and 12" (Flanged or Flangeless appearance)
- Beveled, rounded trim edges smoothly and seamlessly integrate into ceiling
- Housing and Trim/Dome sold separately.
- High quality LM80-tested LEDs for consistent long-life performance and color

SPECIFICATIONS

	5"	8"	12"
DELIVERED LUMENS	684	1255	1989
WATTS	9	15	31
EFFICACY	76	84	64
CRI	90+		
CCT OPTIONS	2700K, 3000K, 3500K or Warm Color Dimming (3000K-2000K)		
VOLTAGE	Universal 120V-277V		
LIGHT DISTRIBUTION	Lambertian		
DIMMING¹	0-10V, ELV, TRIAC (down to 5%) Lutron Hi-lume EcoSystem (down to 0.1%) Lutron Hi-lume 2-wire (down to 1%) EldoLED 0-10V or Dali (down to 0.1%)		
POWER SUPPLY	Constant current driver with +.9 power factor and +85% efficiency. Servicable from below the ceiling.		
CEILING APPEARANCE	Flanged or Flangeless		
CEILING THICKNESS	Flanged: 1/2" to 1" Flangeless: No ceiling thickness limitations		
CEILING APERTURE	6" ceiling cutout	8" ceiling cutout	12.5" ceiling cutout
HOUSING	IC Airtight, Chicago Plenum. IC suitable up to R60 spray foam insulation.		
FINISH	Flanged trim: White (paintable)		
GENERAL LISTINGS	ETL listed. Damp listed.		
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Can be used to comply with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019).		
L70	50,000 hours min		
WARRANTY²	5 years		

Ordering grids available on page 2.

¹See ELEMENT-Lighting.com for dimmer compatibility.

²Visit ELEMENT-Lighting.com for specific warranty limitations and details.



SKYE
SHOWN IN FLANGELESS



DUNE
SHOWN IN FLANGED



TORUS
SHOWN IN FLANGELESS



FLEUR
SHOWN IN FLANGED



BLOOM
SHOWN IN FLANGELESS

REFLECTIONS

INDIRECT DOWNLIGHT - NEW CONSTRUCTION

ORDERING GRIDS

HOUSING

PRODUCT	HOUSING RATING	DRIVER
EDIH5R 5"	I IC AIRTIGHT	INTEGRATED DRIVERS 120V/277V UNIVERSAL/0-10V 5% (LEAVE BLANK)
EDIH8R 8"	C CHICAGO PLENUM	
EDIH12R 12"		
		-ELDO ELDOLED 0.1% 0-10V LINEAR UNV
		-ELDDA ELDOLED 0.1% 0-10V LOGARITHMIC UNV
		-ELDD ELDOLED 0.1% DALI UNV
		-HLECO HI-LUME ECOSYSTEM UNV ¹
		INTEGRATED DRIVERS 120V
		-HL2W HI-LUME 2-WIRE

TRIM / DOME

PRODUCT	CEILING APPEARANCE	CRI/CCT	DOME PATTERN	FINISH
EDIT5R 5"	L FLANGELESS	927 90CRI, 2700K	1 SKYE	W WHITE (PAINTABLE)
EDIT8R 8"	F FLANGED	930 90CRI, 3000K	2 TORUS	
EDIT12R 12"		935 90CRI, 3500K	3 BLOOM	
		9WD 90CRI, WARM DIM 3000K-2000K ¹	4 FLEUR	
			5 DUNE	

W

Must order LED dome (sold separately).

¹HLECO - Lutron has put their entire 0.1% ECO drivers on indefinite hold which impacts all -HLECO item numbers. Please consult factory for alternatives. This does not impact -HL2W.


¹9WD - The 5" Warm Dim option is currently not available due to a driver shortage. We will update the spec sheet as soon as it becomes available. The 8" and 12" Warm Dim options are available to order.

REFLECTIONS


INDIRECT DOWNLIGHT - NEW CONSTRUCTION

DOMES/TRIM


5" FLANGED




8" FLANGED




12" FLANGED




5" FLANGELESS




8" FLANGELESS




12" FLANGELESS




HOUSING

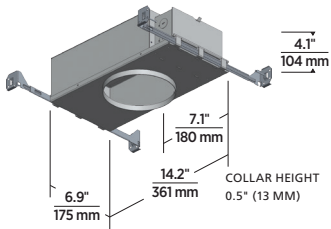

5" APERTURE
IC AIRTIGHT / CHICAGO PLENUM

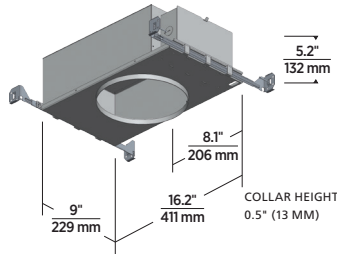

8" APERTURE
IC AIRTIGHT / CHICAGO PLENUM

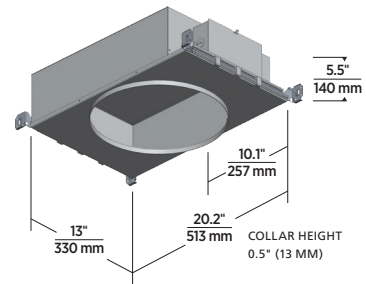

12" APERTURE
IC AIRTIGHT / CHICAGO PLENUM

REFLECTIONS

INDIRECT DOWNLIGHT - NEW CONSTRUCTION

PHOTOMETRICS

Description: Skye 5"
 Total Lumen Output: 684
 Total Power: 9
 Luminaire Efficacy: 76
 Color Temp: 3000K
 CRI: 90+

Description: Skye 8"
 Total Lumen Output: 1255
 Total Power: 15
 Luminaire Efficacy: 84
 Color Temp: 3000K
 CRI: 90+

Description: Skye 12"
 Total Lumen Output: 1989
 Total Power: 31
 Luminaire Efficacy: 64
 Color Temp: 3000K
 CRI: 90+

