

Innovative, first-of-its-kind technology in architectural downlights, ELEMENT Reflections Remodel combines decorative recessed domes with beautifully controlled, reduced-glare indirect LED illumination. ELEMENT Reflections Remodel domes (available in 5", 8" and 12" diameters) are recessed into the ceiling plane and act as reflectors to a completely hidden ring of up-firing LEDs.

The Dune dome transforms beautiful three-dimensional geometry for dramatic visual interest with the subtle play of light and shadow. All ELEMENT Reflections domes also offer two ceiling appearance options: flanged for a more traditional ceiling appearance; or flangeless for a smooth, mudded-in ceiling appearance.

Pristine design and illumination:

- Reduced glare, indirect illumination (dimnable for enhanced mood-setting options)
- Three Aperture Options: 5", 8" and 12"
- Beveled, rounded trim edges smoothly and seamlessly integrate into ceiling

High quality LM80-tested LEDs

for consistent long-life performance and color

SPECIFICATIONS

| | |
|---------------------|--|
| DELIVERED LUMENS | 5": 684 |
| | 8": 1255 |
| | 12": 1989 |
| WATTS | 5": 9 |
| | 8": 15 |
| | 12": 31 |
| VOLTAGE | Universal 120V-277V |
| DIMMING* | 0-10V, ELV, TRIAC, Eco-system, Dali |
| POWER SUPPLY | Constant current driver with +.9 power factor and +85% efficiency |
| LIGHT DISTRIBUTION | Lambertian |
| CCT | 2700K, 3000K, 3500K, or Warm Color Dimming (3000K-2000K) |
| CRI | 90+ |
| CEILING APPEARANCE | Flanged (Trims accommodate a 1/2" to 1" ceiling thickness) or Flangeless with integrated mud plate |
| HOUSING | IC |
| GENERAL LISTING | ETL listed, Damp listed |
| CALIFORNIA TITLE 24 | Registered CEC Appliance Database. Can be used to comply with CEC 2016 Title 24 Part 6. |
| LED LIFETIME | L70; 50,000 Hours |
| WARRANTY* | 5 Years |

*Visit ELEMENT-lighting.com for specific details.



DUNE
shown in flanged




DUNE
shown in flangeless

ORDERING INFORMATION


| PRODUCT SERIES | CEILING APPEARANCE | CRI/CCT | DOMES | HOUSING RATING | DRIVER | FINISH |
|----------------|-----------------------|---------------------------------|--------|----------------|---|---------|
| EDIM5R | RL REMODEL FLANGELESS | 927 90 CRI, 2700K | 5 DUNE | I IC | ELV/TRIAC/0-10V UNV** | W WHITE |
| EDIM8R | RF REMODEL FLANGED | 930 90 CRI, 3000K | | | -ELDD ELDLED 0.1% 0-10V LINEAR UNV** | |
| EDIM12R | | 935 90 CRI, 3500K | | | -ELDD0A ELDLED 0.1% 0-10V LOGARITHMIC UNV** | |
| | | WD 90 CRI, WARM DIM 3000K-2000K | | | -ELD1 ELDLED 1% 0-10V LINEAR UNV** | |
| | | | | | -ELD1A ELDLED 1% 0-10V LOGARITHMIC UNV** | |
| | | | | | -ELDD ELDLED 0.1% DALI UNV** | |
| | | | | | -HLECO HI-LUME ECO-SYSTEM FADE-TO-BLACK UNV** | |
| | | | | | -HL2W HI-LUME 2 WIRE - 120V ONLY* | |

*HL2W - 120V INPUT VOLTAGE ONLY. **ALL DRIVERS EXCEPT LUTRON HL2W ARE UNV = 120V/277V INPUT VOLTAGE.


DOME/TRIM




Dune Flanged 5"



Dune Flanged 8"

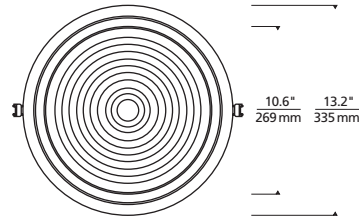


Dune Flanged 12"




Dune Flangeless* 5"

*shown with plaster plate




Dune Flangeless* 8"

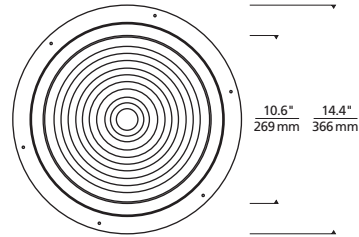

Dune Flangeless* 12"


DOME/TRIM WITH REMOTE JUNCTION BOX




Flanged 5"

Flangeless 5"

J-Box (side view/top view)

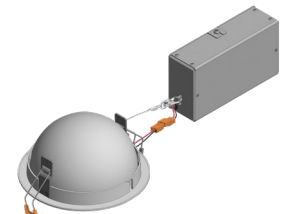


3/4 Flanged View

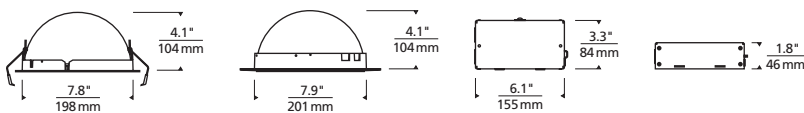


Flanged 8"

Flangeless 8"

J-Box (side view/top view)

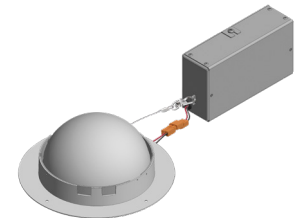

3/4 Flangeless View with integrated mud plate

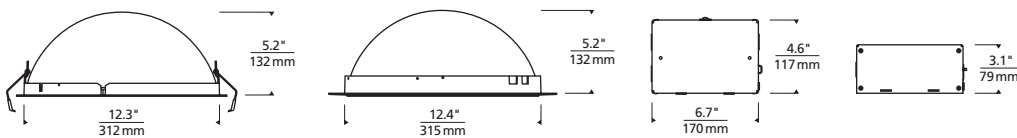

Flanged 12"

Flangeless 12"

J-Box (side view/top view)

PHOTOMETRICS*

*For latest photometrics, please visit www.ELEMENT-Lighting.com

DUNE 5"




Total Lumen Output: 684
 Total Power: 9
 Luminaire Efficacy: 76
 Color Temp: 3000K
 CRI: 90+

DUNE 8"

Total Lumen Output: 1255
 Total Power: 15
 Luminaire Efficacy: 84
 Color Temp: 3000K
 CRI: 90+

DUNE FLANGELESS 12"

Total Lumen Output: 1989
 Total Power: 31
 Luminaire Efficacy: 64
 Color Temp: 3000K
 CRI: 90+

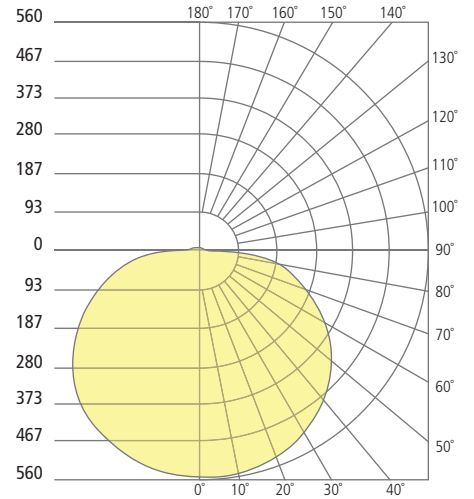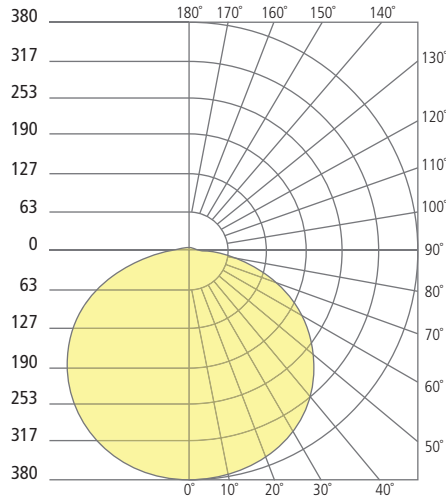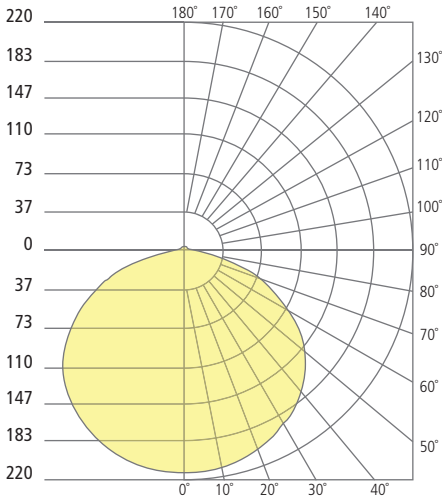

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES



2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.

TECH LIGHTING
 VISUAL COMFORT GROUP

7400 Linder Avenue, Skokie, Illinois 60077
 T 847.410.4400 F 847.410.4500