

REFLECTIONS

SKYE FLANGELESS INDIRECT DOWNLIGHT



Innovative, first-of-its-kind technology in architectural downlights, ELEMENT Reflections combines decorative recessed domes with beautifully controlled, reduced-glare indirect LED illumination. ELEMENT Reflections domes (available in 5", 8" and 12" diameters) are recessed into the ceiling plane and act as reflectors to a completely hidden ring of up-firing LEDs.

The Skye dome transforms beautiful three-dimensional geometry for dramatic visual interest with the subtle play of light and shadow. All ELEMENT Reflections domes also offer two ceiling appearance options: flanged for a more traditional ceiling appearance; or flangeless for a smooth, mudded-in ceiling appearance.

High quality LM80-tested LEDs
for consistent long-life performance and color

Pristine design and illumination:

- Reduced glare, indirect illumination (dimnable for enhanced mood-setting options)
- Three Aperture Options: 5", 8" and 12"
- Beveled, rounded trim edges smoothly and seamlessly integrate into ceiling

Housing and Trim/Dome sold separately.

SPECIFICATIONS

| | |
|--------------------|--|
| DELIVERED LUMENS | 5": 684 |
| | 8": 943 |
| | 12": 1989 |
| WATTS | 5": 9.2 |
| | 8": 15 |
| | 12": 30.8 |
| VOLTAGE | Universal 120V-277V** |
| DIMMING | 0-10V, ELV, TRIAC, Eco-system, Hi-Lume 2-Wire, Dali |
| LIGHT DISTRIBUTION | Lambertian |
| CCT | 2700K, 3000K, 3500K, or Warm Color Dimming (3000K-2000K) |
| CRI | 90+ |
| CEILING APPEARANCE | Flangeless |
| HOUSING | IC Airtight or Chicago Plenum |
| GENERAL LISTING | ETL, Damp listed, Title 24 (2700K, 3000K) |
| LED LIFETIME | L70; 50,000 Hours |
| WARRANTY* | 5 Years |



SKYE
shown in flangeless

*Visit ELEMENT-lighting.com for specific warranty limitations and details.

ORDERING INFORMATION







| HOUSING | SIZE | HOUSING RATING | DIMMABLE DRIVER | |
|---------|------------------|------------------|-----------------|---------------------------------------|
| EDIH | 5R 5" DIAMETER | I IC AIRTIGHT | | ELV/TRIAC/0-10V UNV* (LEAVE BLANK) |
| | 8R 8" DIAMETER | C CHICAGO PLENUM | -ELD0 | ELDOLED 0.1% 0-0V LINEAR UNV* |
| | 12R 12" DIAMETER | | -ELD0A | ELDOLED 0.1% 0-0V LOGARITHMIC UNV* |
| | | | -ELD1 | ELDOLED 1% 0-0V LINEAR UNV* |
| | | | -ELD1A | ELDOLED 1% 0-0V LOGARITHMIC UNV* |
| | | | -ELDD | ELDOLED 0.1% DALI UNV* |
| | | | -HLECO | HI-LUME ECO-SYSTEM FADE-TO-BLACK UNV* |
| | | | -HL2W | HI-LUME 2-WIRE** |

MUST ORDER LED DOME (SOLD SEPARATELY).
* UNV = 120V/277V INPUT VOLTAGE. ** HL2W 120V INPUT ONLY

| TRIM/DOME | SIZE | CEILING APPEARANCE | CRI | CCT | DOME PATTERN | FINISH |
|-----------|------------------|--------------------|---------|-----------------------------------|--------------|---------|
| EDIT | 5R 5" DIAMETER | L FLANGELESS | 9 90 CR | 27 2700K | 1 SKYE | W WHITE |
| | 8R 8" DIAMETER | | | 30 3000K | | |
| | 12R 12" DIAMETER | | | 35 3500K | | |
| | | | | WD 3000K-2000K WARM COLOR DIMMING | | |

REFLECTIONS

SKYE FLANGELESS INDIRECT DOWNLIGHT

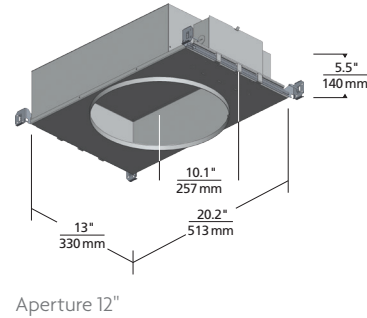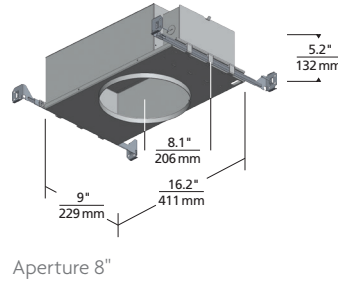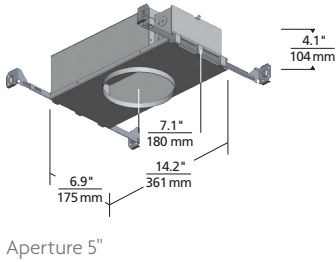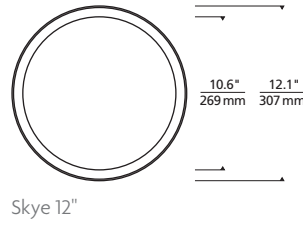

PHOTOMETRICS*

*For latest photometrics, please visit www.ELEMENT-Lighting.com

SKYE FLANGELESS 5"




| | |
|---------------------|-------|
| Total Lumen Output: | 684 |
| Total Power: | 9.2 |
| Luminaire Efficacy: | 74.1 |
| Color Temp: | 3000K |
| CRI: | 90+ |

SKYE FLANGELESS 8"

| | |
|---------------------|-------|
| Total Lumen Output: | 943 |
| Total Power: | 15 |
| Luminaire Efficacy: | 62.4 |
| Color Temp: | 3000K |
| CRI: | 90+ |

SKYE FLANGELESS 12"

| | |
|---------------------|-------|
| Total Lumen Output: | 1989 |
| Total Power: | 30.8 |
| Luminaire Efficacy: | 64.6 |
| Color Temp: | 3000K |
| CRI: | 90+ |

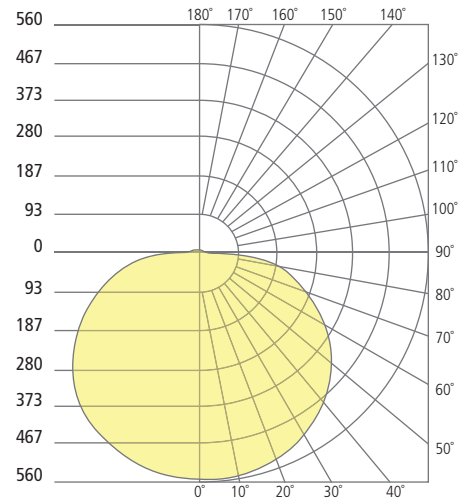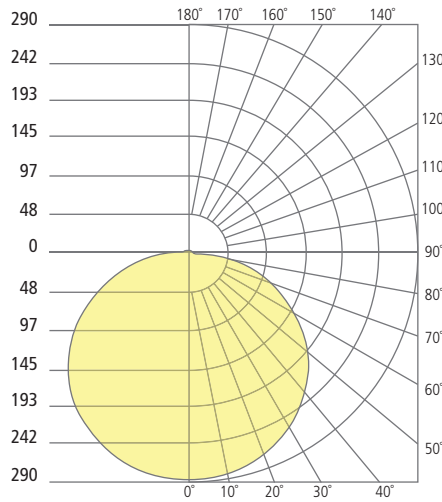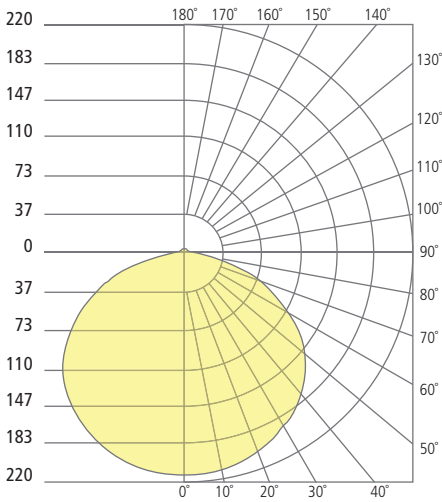

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

ELEMENT
by Tech Lighting[®]

GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077
T 847.410.4400 F 847.410.4500



© 2016 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.