







Whether being used to highlight architectural elements, to accent specific features of an environment, or for use as task lighting, ELEMENT Merge recessed track allows spot heads or pendants to be added directly into the recessed channel at any point along its concealed low-voltage bus system. All ELEMENT Merge recessed track components feature a beveled aperture to integrate seamlessly with architecture for sleek ceiling to fixture transitions. Available in 2', 4', 6' and 8' lengths for lay-in installation.

Key Features:

- Two spot head options: Merge Gimbal and Merge Drop-down
- Twist-and-lock design allows LED adjustable spot heads to be placed anywhere along the bus channel
- Low profile design for use in 2x6 construction
- Lay-in (T-grid) optimized for 9/16" or 15/16"
- Continuous linear runs require a start unit, intermediate fixtures and end unit
- FreeJack connector allows the use of any Tech Lighting low-voltage head or pendant

SPECIFICATIONS

VOLTAGE	120V or 277V (Concealed 10 gauge, low-voltage bus bar, order 12-volt remote transformer sold separately)
CEILING APERTURE	3" beveled
CEILING APPEARANCE	Lay-in (T-grid) optimized for 9/16" or 15/16"
HOUSING	IC Airtight available in 2', 4', 6' and 8'. IC suitable up to R60 spray foam insulation (Consult Quotes Department for Chicago Plenum option)
GENERAL LISTING	ETL
CONSTRUCTION	Housing: 20 gauge sheet metal Extrusion: Aluminum
HARDWARE	Steel
FINISH	White Powder Coat
WARRANTY*	1 Year*

^{*}Visit ELEMENT-lighting.com for specific warranty limitations and details.

Notes: Typical max run length is 40' for the low-voltage bus which can be powered from both sides for a total of 80'; system wattage will impact max run length



MERGE shown lay-in











HOUSING



D=3.0"

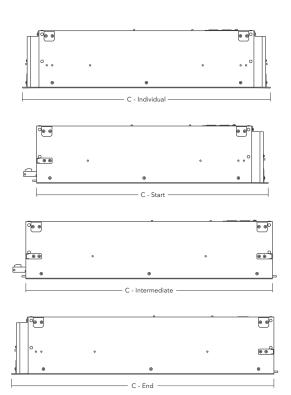

DIMENSIONS

	LAY-IN (T-GRID)		
	А	В	С
2' INDIVIDUAL	5.75	5.64	23.73
2' START	5.75	5.64	22.36
2' INTERMEDIATE	5.75	5.64	24.00
2' END	5.75	5.64	25.36
4' INDIVIDUAL	5.75	5.64	47.73
4' START	5.75	5.64	46.36
4' INTERMEDIATE	5.75	5.64	48.00
4' END	5.75	5.64	49.36
6' INDIVIDUAL	5.75	5.64	71.73
6' START	5.75	5.64	70.63
6' INTERMEDIATE	5.75	5.64	72.00
6' END	5.75	5.64	73.36
8' INDIVIDUAL	5.75	5.64	95.73
8' START	5.75	5.64	94.36
8' INTERMEDIATE	5.75	5.64	96.00
8' END	5.75	5.64	97.36

All dimensions given in inches.



GRIDS

LINEAR CHANNELS

SYSTEM		OMINAL NGTH	TY	PE	0	UTPUT		ILING PEARANCE	FIN	IISH
RLS3	4	2 FT 4 FT 6 FT 8 FT	S M E I	START INTERMEDIATE END INDIVIDUAL	0	NO INDIRECT - 12V BUS ONLY*	LI	LAY-IN (T-GRID)	W	MATTE WHITE
RLS3						0		LI		W

^{*}TRANSFORMER REQUIRED TO ENERGIZE THE LOW-VOLTAGE BUS.

TRANSFORMERS*
(REQUIRED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	DIMMING
700AT060EL 700AT152EL 700AT152ELD010 700AT150T 700AT150T277 700AT302EL 700AT300T 700AT300T	ELECTRONIC, 60W, 120V ELECTRONIC, 150W, 120V ELECTRONIC, 150W, 120V MAGNETIC, 150W, 120V MAGNETIC, 150W, 277V ELECTRONIC, 300W, 120V MAGNETIC, 300W, 120V MAGNETIC, 300W, 120V MAGNETIC, 300W, 277V	ELV ELV 0-10V MAGNETIC MAGNETIC ELV MAGNETIC MAGNETIC

DO NOT LOAD TRANSFORMER ABOVE 70%OF RATED LOAD DUE TO IN-RUSH CURRENT. *CONSULT SPEC SHEETS FOR DIMENSIONS.

PROJECT INFO

FIXTURE TYPE & QUANTITY	JOB NAME & INFO	NOTES



GENERATION BRANDS 7400 Linder Avenue, Skokie, Illinois 60077 T 847.410.4400 F 847.410.4500