


# ELEMENT™ 3" LED

## SHALLOW ADJUSTABLE DOWNLIGHT



SHOWN IN FLANGELESS BEVEL SQUARE

The ELEMENT 3" LED Shallow Adjustable Downlight provides a beautiful architectural appearance and high lumen performance for shallow ceiling plenum installations. Designed with a shallow 3" housing with the same trims as the entire ELEMENT 3" platform for a consistent aesthetic. Ideal for space-constrained environments such as elevators and healthcare soffits. Featuring full adjustability with lockable, hot-aiming with 0°-40° tilt and 361° rotation to eliminate dead spots. Flangeless in wood ceiling option allows for a smooth appearance using any flangeless trim.

- Lockable, hot aiming with 0-40° tilt and 361° rotation
- Trims match the ELEMENT 3" platform
- Solite Soft Focus lens option
- Includes integral junction box approved for branch circuit through wiring
- IC-Rated, Airtight, Chicago Plenum
- Damp Listed, Shower version Wet Listed

### LUMEN/CBCP MULTIPLIERS

CCT	80 CRI MULTIPLIER	90 CRI MULTIPLIER
2700K	1.12	0.98
3000K	1.18	1.00
3500K	1.22	1.01

Lumen output will vary by CCT and CRI.  
See photometric charts for output information.

### SPECIFICATIONS

	STATIC WHITE				WARM DIM	
	HIGH OUTPUT		LOW OUTPUT		HIGH OUTPUT	LOW OUTPUT
DELIVERED LUMENS	1697	1440	1303	1106	1225	941
WATTS	16	16	12	12	16	12
EFFICACY	106	90	109	92	77	78
CRI	80+	90+	80+	90+	90+	
CBCP	10° - 24,575   18° - 5,639   25° - 5,033   40° - 2,739   60° - 1,699				18° - 4,793   25° - 4,221   40° - 2,328   60° - 1,444	
CCT	2700K, 3000K, or 3500K				3000K - 1800K	
COLOR CONSISTENCY	1-step				2-step	
VOLTAGE	120V or 277V					
DIMMING <sup>1</sup>	Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming down to 1%					
POWER SUPPLY	Constant current driver with +.9 power factor and +80% efficiency					
OPTICS	Field changeable: 10°, 18°, 25°, 40°, or 60° TIR				Field changeable: 18°, 25°, 40°, or 60° TIR	
ADJUSTABILITY	Lockable, hot-aiming, 0-40° tilt, 361° rotation					
CEILING APPEARANCE	Flanged, flangeless or flangeless in wood ceiling					
CEILING THICKNESS	Flanged: Up to 2-1/2" Flangeless: No ceiling thickness limitations   Flangeless in wood ceiling: 1/2" to 1-1/2" Note: Thicker ceilings impact light cutoff					
CEILING APERTURE	3-7/8" ceiling cutout					
HOUSING	IC Rated, Airtight, Chicago Plenum. IC suitable up to R60 spray foam insulation. Sauna/steam-room use available only with combination of H shower trim, LO Low output housing and S IC Airtight housing rating.					
CONSTRUCTION	Housing: Heavy-gauge, cold-rolled steel Trim: Die-cast aluminum					
FINISH	Housing: Black powder coat Trim: Antique Bronze, Black, Satin Nickel, or White (paintable)					
GENERAL LISTINGS	ETL Listed. Damp Location. Shower version Wet Listed.					
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Complies with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019) (for 90 CRI versions).					
L70	50,000 hours min					
WARRANTY <sup>2</sup>	5 years					

Data in chart reflect 3000K/90 CRI values unless noted.  
Custom output/custom RAL/custom CCT available, contact Quotes Department

Ordering grids available on page 2.

<sup>1</sup>See [visualcomfort.com](http://visualcomfort.com) for dimmer compatibility.

<sup>2</sup>Visit [visualcomfort.com](http://visualcomfort.com) for specific warranty limitations and details.

# ELEMENT™ 3" LED

## SHALLOW ADJUSTABLE DOWNLIGHT

### ORDERING GRIDS

#### HOUSING

PRODUCT	CEILING APPEARANCE	LAMP	CRI/CCT	BEAM SPREAD	FUNCTION	HOUSING RATING	DRIVER
<b>E3R</b> ELEMENT 3" ROUND	<b>LF</b> FLANGELESS	<b>-LH</b> HIGH OUTPUT, 16W <sup>2</sup>	<b>827</b> 80 CRI, 2700K, 1-STEP	<b>0</b> 10° <sup>4</sup>	<b>A</b> ADJUSTABLE	<b>SH</b> SHALLOW IC	<b>INTEGRATED DRIVERS 120V/277V</b>
<b>E3S</b> ELEMENT 3" SQUARE	<b>FF</b> FLANGED	<b>-LO</b> LOW OUTPUT, 12W <sup>3</sup>	<b>830</b> 80 CRI, 3000K, 1-STEP	<b>1</b> 18°		<b>CSH</b> SHALLOW CHICAGO PLENUM	UNIVERSAL PHASE/0-10V 1% (LEAVE BLANK) <sup>5</sup>
	<b>WC</b> WOOD CEILING†		<b>835</b> 80 CRI, 3500K, 1-STEP	<b>2</b> 25°			
			<b>927</b> 90 CRI, 2700K, 1-STEP	<b>4</b> 40°			
			<b>930</b> 90 CRI, 3000K, 1-STEP	<b>6</b> 60°			
			<b>935</b> 90 CRI, 3500K, 1-STEP				
			<b>WD</b> 90 CRI, 3000-1800K, WARM DIM, 2-STEP				
					<b>A</b>		

Trims are required and must be ordered separately.

For dimmer details, refer to dimmer compatibility chart.

<sup>1</sup>WC - Wood ceiling option accommodates flangeless trims only.

<sup>2</sup>LH - High output available for wet rated. Not rated for sauna/steam-room.

<sup>3</sup>LO - Sauna/steam-room use available only with combination of H shower trim, LO low output housing, and S IC Airtight housing rating.

<sup>4</sup>0 - 10° optic has a unique LED module not available with warm dim. To change optics to 18°, 25°, 40°, or 60° a new LED module is required; contact Customer Service.

<sup>5</sup>Universal dimming is reverse-phase, forward-phase, TRIAC and 0-10V. 277V is only compatible with 0-10V dimming.

#### TRIM

PRODUCT	CEILING APPEARANCE	STYLE	APERTURE	FINISH
<b>E3R</b> ELEMENT 3" ROUND	<b>L</b> FLANGELESS	<b>B</b> BEVEL	<b>-O</b> NO LENS	<b>Z</b> ANTIQUE BRONZE
<b>E3S</b> ELEMENT 3" SQUARE	<b>F</b> FLANGED UP TO 1" CEILING THICKNESS	<b>F</b> FLAT	<b>-H</b> SHOWER <sup>1</sup>	<b>B</b> BLACK
	<b>F15</b> FLANGED 1.1"-1.5" CEILING THICKNESS		<b>-L</b> LENSED	<b>S</b> SATIN NICKEL
	<b>F20</b> FLANGED 1.6"-2.0" CEILING THICKNESS			<b>W</b> WHITE
	<b>F25</b> FLANGED 2.1"-2.5" CEILING THICKNESS			

Wood ceiling option accommodates flangeless trims only.

<sup>1</sup>H - Sauna/steam-room use available only with combination of H shower trim, LO low output housing, and S IC Airtight housing rating.

Shower lens includes a gasket.

#### WALL WASH TRIM

PRODUCT	CEILING APPEARANCE	FUNCTION	APERTURE	LED
<b>E3R</b> ELEMENT 3" ROUND	<b>L</b> FLANGELESS	<b>W</b> WALL WASH	<b>-Z</b> ANTIQUE BRONZE	<b>-LED</b>
<b>E3S</b> ELEMENT 3" SQUARE	<b>F</b> FLANGED		<b>-B</b> BLACK	
	<b>WC</b> WOOD CEILING†		<b>-S</b> SATIN NICKEL	
			<b>-W</b> WHITE	
		<b>W</b>	<b>-</b>	<b>-LED</b>

<sup>1</sup>WC - Wood ceiling option accommodates WC flangeless trims only.

#### LENSES / LOUVERS

PRODUCT <sup>1</sup>	
<b>140MR16SF</b>	SOLITE SOFT FOCUS LENS
<b>140MR16SB</b>	SANDBLASTED LENS
<b>140MR16LL</b>	LINEAR SPREAD LENS
<b>140MR16DF</b>	DIFFUSER SPREAD LENS
<b>EL2RHCBK</b>	EGGCRATE/HEXCELL LOUVER

<sup>1</sup>For additional lenses, louvers, optical controls and accessories, reference visualcomfort.com. Lens/louvers mounted to lamp assembly only (max 2).

#### FROSTED BOROSILICATE LENS KIT

PRODUCT	
<b>240E3SBLSP-B</b>	BOROSILICATE LENS KIT   ELEMENT 3" SQUARE BEVEL TRIM
<b>240E3SQLSP-B</b>	BOROSILICATE LENS KIT   ELEMENT 3" SQUARE FLAT TRIM
<b>240E3RBLSP-B</b>	BOROSILICATE LENS KIT   ELEMENT 3" ROUND BEVEL TRIM
<b>240E3RDLSP-B</b>	BOROSILICATE LENS KIT   ELEMENT 3" ROUND FLAT TRIM

Includes frosted borosilicate lens, lens spring, and screws to mount to ELEMENT 3" trim.

#### REPLACEMENT OPTICS

PRODUCT	BEAM SPREAD
<b>353E4LEDCOPT</b>	<b>18</b> 18°
	<b>25</b> 25°
	<b>40</b> 40°
	<b>60</b> 60°
<b>353E4LEDCOPT</b>	

#### PLASTER PLATES

PRODUCT <sup>1</sup>	
<b>150E3RPPLT-2</b>	3" PLASTER PLATE   ROUND DIE-CAST METAL <sup>1</sup>
<b>150E3SPPLT-2</b>	3" PLASTER PLATE   SQUARE DIE-CAST METAL <sup>1</sup>
<b>150E3RTPPLT-W</b>	3" PLASTER PLATE   ROUND SHEET METAL <sup>2</sup>
<b>150E3STPPLT-W</b>	3" PLASTER PLATE   SQUARE SHEET METAL <sup>2</sup>

Plaster plates are used to convert flanged housings into flangeless housings.

<sup>1</sup>Ships standard with flangeless housings. Round not compatible with Lutron Hi-Lume or eldoLED drivers.

<sup>2</sup>Optional, thinner, meshed sheet metal mud plates available for minimized plaster feathering to meet installer preference. Round not compatible with Lutron Hi-Lume or eldoLED drivers. Square not compatible with eldoLED drivers.

#### PREMIUM LENS HOLDER

PRODUCT	LENSES
<b>240E3LENSHLDR</b>	<b>1</b> ONE LENS
	<b>2</b> TWO LENSES

#### 240E3LENSHLDR

Provides more secure mounting of additional lenses than the lens holder that ships with each fixture.

Not compatible with the 10° beam spread.




# ELEMENT™ 3" LED


## SHALLOW ADJUSTABLE DOWNLIGHT

TRIMS


FLANGED




ROUND BEVEL




SQUARE BEVEL




ROUND FLAT



SQUARE FLAT




ROUND WALL WASH




SQUARE WALL WASH

FLANGELESS




ROUND BEVEL



SQUARE BEVEL




ROUND FLAT



SQUARE FLAT



ROUND WALL WASH



SQUARE WALL WASH

FINISH



ANTIQUE BRONZE



BLACK



SATIN NICKEL




WHITE (PAINTABLE)

FLANGELESS IN WOOD CEILING



ROUND BEVEL (ANTIQUE BRONZE)




SQUARE BEVEL (SATIN NICKEL)



ROUND FLAT (ANTIQUE BRONZE)



SQUARE FLAT (SATIN NICKEL)



ROUND WALL WASH (ANTIQUE BRONZE)



SQUARE WALL WASH (SATIN NICKEL)

LENS OPTION



SHOWN WITH AND WITHOUT A LENS (SQUARE FLANGED BEVEL)



SHOWN WITH AND WITHOUT A LENS (ROUND FLANGELESS BEVEL)




# ELEMENT™ 3" LED


## SHALLOW ADJUSTABLE DOWNLIGHT

WARM DIM CURVE

CCT vs. Forward Current,  $T_c=25^\circ\text{C}$

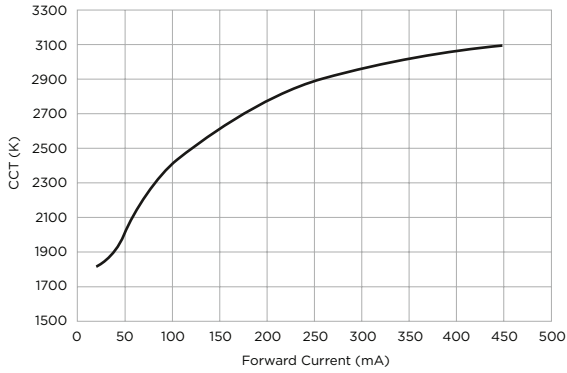

### HOUSING

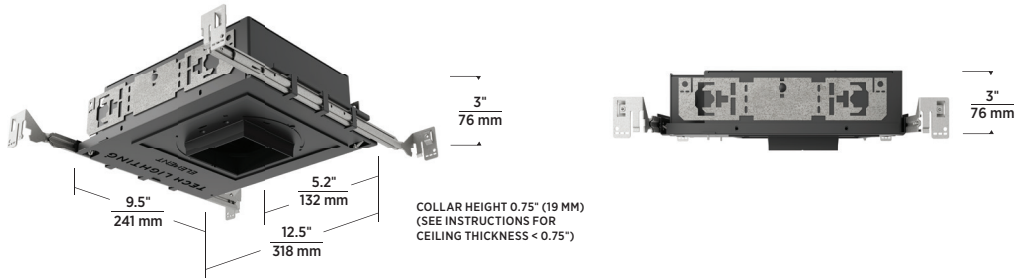


IC AIRTIGHT / CHICAGO PLENUM

# ELEMENT™ 3" LED


## SHALLOW ADJUSTABLE DOWNLIGHT

### PLASTER PLATES

#### INCLUDED DIE-CAST

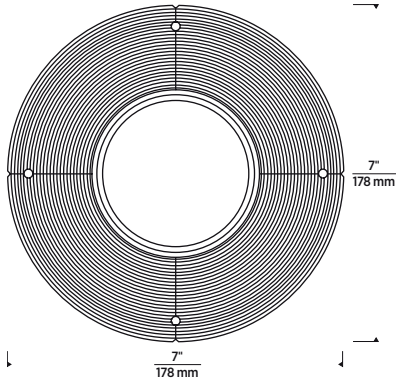


ROUND DIE-CAST (INCLUDED FOR FLANGELESS INSTALLATION)

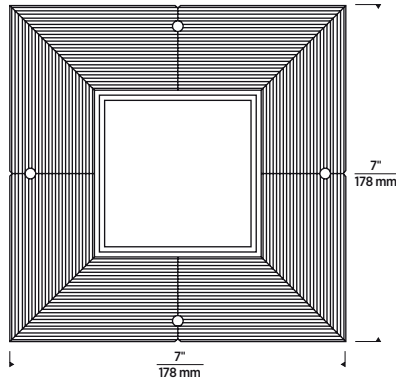


SQUARE DIE-CAST (INCLUDED FOR FLANGELESS INSTALLATION)

#### OPTIONAL SHEET METAL





ROUND SHEET METAL (OPTIONAL FOR FLANGELESS INSTALLATION)



SQUARE SHEET METAL (OPTIONAL FOR FLANGELESS INSTALLATION)

### FLANGELESS IN WOOD CEILING TRIM ADAPTER

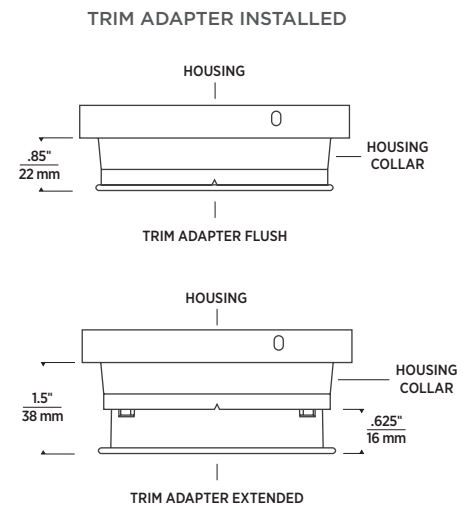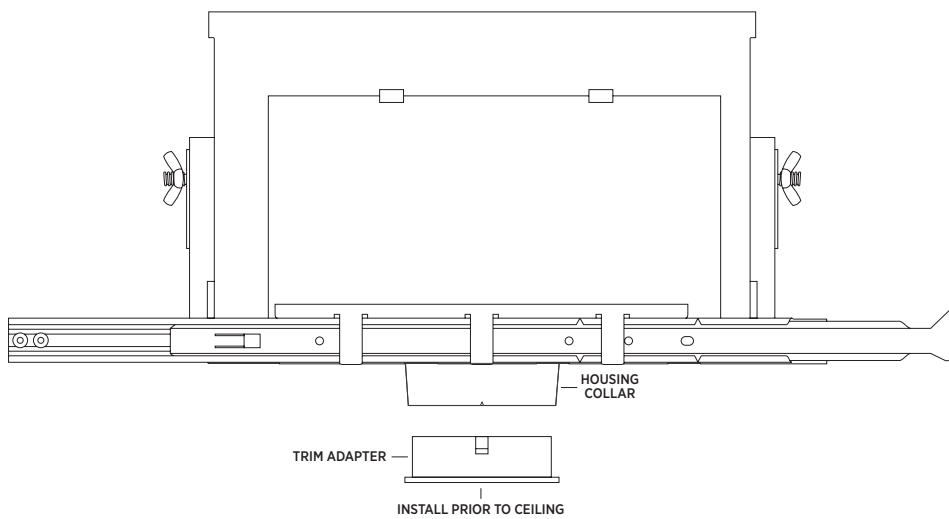

Wood ceiling housings ("WC" designation in the ordering grid) ship with an adjustable trim adapter that inserts into the housing aperture and allows standard ELEMENT 3" flangeless trims to achieve a truly flangeless, flush ceiling appearance in special applications such as wood or stone installation. For use in new construction. Consult installation instructions regarding plenum requirements and ceiling thickness ratios.

# ELEMENT™ 3" LED

## SHALLOW ADJUSTABLE DOWNLIGHT

### PHOTOMETRICS

Description: 3" LED Module  
10° Beam, 0° Tilt  
90 CRI, 3000K

Input Power: 18.2W  
Input Power Factor: 0.99  
Absolute Luminous Flux (Lumens): 987  
Lumen Efficacy (Lumens per Watt): 54.2

Description: 3" LED Module  
18° Beam, 0° Tilt  
90 CRI, 3000K

Input Power: 15.8W  
Input Power Factor: 0.98  
Absolute Luminous Flux (Lumens): 1278  
Lumen Efficacy (Lumens per Watt): 80.9

Description: 3" LED Module  
25° Beam, 0° Tilt  
90 CRI, 3000K









Input Power: 15.8W  
Input Power Factor: 0.98  
Absolute Luminous Flux (Lumens): 1421  
Lumen Efficacy (Lumens per Watt): 89.9

Output difference between CCTs - 5%, CRIs - 15%.

ANGLE	0°	45°	90°
0°	24575	24575	24575
5°	12004	10898	12296
10°	1418	1275	1517
15°	355	332	340
20°	171	165	154
25°	90	85	87
30°	52	48	49
35°	33	31	32
40°	21	19	19
45°	10	11	8
50°	3	6	3
55°	2	2	2
60°	1	1	1
65°	0	0	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0
90°	0	0	0

ANGLE	0°	45°	90°
0°	5546	5546	5546
5°	4951	5044	4838
10°	3208	3326	3167
15°	1748	1859	1721
20°	882	1028	871
25°	395	485	380
30°	171	195	167
35°	83	84	81
40°	49	52	50
45°	29	34	30
50°	14	22	13
55°	12	15	11
60°	11	12	9
65°	7	10	6
70°	6	6	6
75°	5	6	5
80°	5	5	5
85°	5	5	5
90°	4	5	5

ANGLE	0°	45°	90°
0°	4966	4966	4966
5°	4647	4710	4525
10°	3677	3750	3542
15°	2292	2346	2143
20°	1103	1188	986
25°	465	559	417
30°	211	240	187
35°	98	100	89
40°	53	56	50
45°	30	35	29
50°	16	22	14
55°	11	13	10
60°	9	9	8
65°	8	7	7
70°	7	6	6
75°	6	6	6
80°	6	5	5
85°	5	5	5
90°	5	5	5

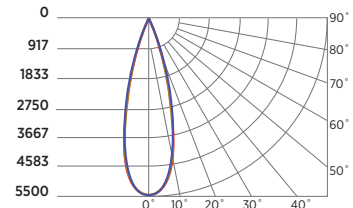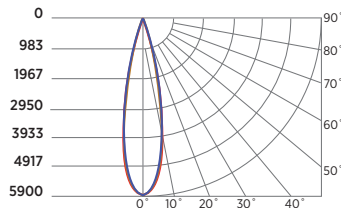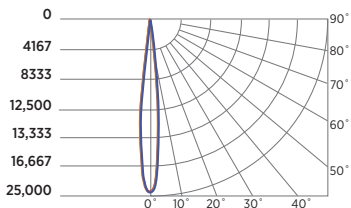

# ELEMENT™ 3" LED

## SHALLOW ADJUSTABLE DOWNLIGHT

### PHOTOMETRICS

Description: 3" LED Module  
40° Beam, 0° Tilt  
90 CRI, 3000K

Input Power: 15.8W

Input Power Factor: 0.98

Absolute Luminous Flux (Lumens): 1440

Lumen Efficacy (Lumens per Watt): 91.1

Description: 3" LED Module  
60° Beam, 0° Tilt  
90 CRI, 3000K

Input Power: 15.7W

Input Power Factor: 0.98






Absolute Luminous Flux (Lumens): 1343

Lumen Efficacy (Lumens per Watt): 85.5

Output difference between CCTs - 5%, CRIs - 15%.

ANGLE	0°	45°	90°
0°	2729	2729	2729
5°	2686	2706	2649
10°	2503	2538	2439
15°	2147	2183	2100
20°	1617	1683	1572
25°	915	1000	904
30°	388	434	375
35°	153	162	157
40°	70	77	71
45°	31	41	32
50°	10	21	11
55°	7	10	7
60°	4	6	4
65°	3	4	3
70°	3	3	13
75°	2	3	2
80°	2	2	2
85°	2	2	2
90°	1	2	2

ANGLE	0°	45°	90°
0°	1699	1699	1699
5°	1654	1654	1654
10°	1548	1548	1548
15°	1403	1403	1403
20°	1163	1163	1163
25°	854	854	854
30°	580	580	580
35°	374	374	374
40°	219	219	219
45°	112	112	112
50°	48	48	48
55°	23	23	23
60°	9	9	9
65°	7	7	7
70°	6	6	6
75°	6	6	6
80°	5	5	5
85°	5	5	5
90°	5	5	5

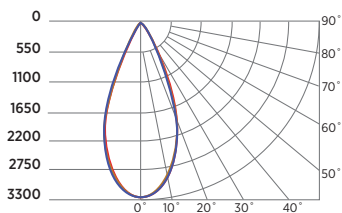

# ELEMENT™ 3" LED

## SHALLOW ADJUSTABLE DOWNLIGHT

### PROJECT INFORMATION

---

### JOB NAME AND INFORMATION

---

---

---

---

---

---

---

---

---

---

### FIXTURE TYPE AND QUANTITY

---

---

---

---

---

---

---

---

---

---

### NOTES

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---