

3" HALOGEN

REMODEL ADJUSTABLE DOWNLIGHT

Halogen MR16 remodel downlight with architectural appearance. 0°- 35° tilt and 353° internal rotation, includes hot aiming and locking.

- 0°- 35° tilt and 353° internal rotation
- Compatible with LED MR16 replacement lamp. LED MR16 requires no load electronic transformer (12 watt max).
- Power supplies can be accessed through the aperture
- Accepts 2 optical controls and an optional trim mounted lens
- Glare reducing snoot integrated
- Lensed and shower options include Solite™ soft focus lens at aperture

Installation


- Use standard 4-1/4" hole saw
- After inserting housing, brackets are driven by screw for maximum clamping force to provide robust mounting to ceiling
- Requires unique remodel trim

SPECIFICATIONS

LAMP	Low-voltage Halogen MR16 lamp. Compatible with LED MR16 replacement lamps.
WATTS	Halogen: 75 Non-IC only
VOLTAGE	120V or 277V
DIMMING*	ELV or MLV (Dimming dependent on transformer type).
ADJUSTABILITY	Hot aiming, including 0°-35° Tilt and 353° rotation
CEILING APPEARANCE	Flanged (Accommodates up to 2.5" drywall ceiling thickness, depending on trim)
CEILING APERTURE	4-1/4"
HOUSING	Non-IC Airtight
POWER SUPPLY	Halogen: Electronic or Magnetic transformer. No load transformer required for LED MR16 compatibility (12 watt max).
GENERAL LISTING	ETL listed. Damp listed. Shower version wet listed.
CONSTRUCTION	Housing: Heavy gauge cold rolled steel Trims: Die-cast aluminum
FINISH	Housing: Black Trims: Antique Bronze, Black, Satin Nickel, White (paintable)
WARRANTY**	1 year

*See ELEMENT-lighting.com for dimmer compatibility.

**Visit ELEMENT-lighting.com for specific warranty limitations and details.

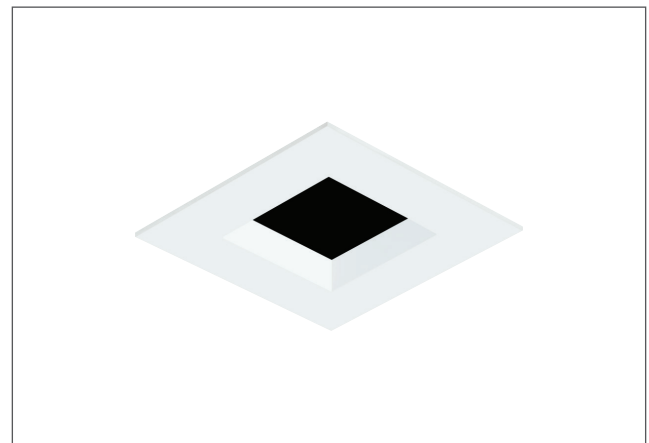

shown in flanged bevel square



0° Tilt



35° Tilt




Screw driven swing arm




Swing arm mounting

TRIMS

ROUND

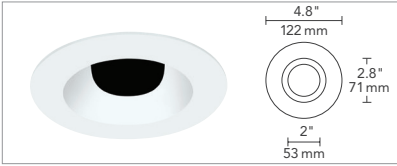


FLANGED BEVEL

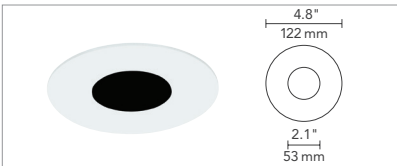


FLANGED FLAT

SQUARE

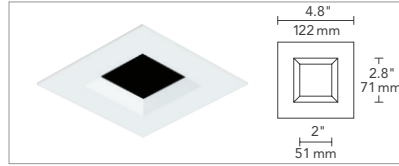

FLANGED BEVEL

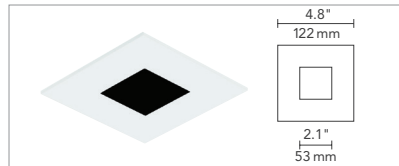

FLANGED FLAT

FINISH



ANTIQU
BRONZE



BLACK




SATIN
NICKEL



WHITE
(PAINTABLE)

3" HOUSING



NON-IC
ACCOMMODATES
ROUND OR SQUARE TRIM

3" HALOGEN

REMODEL ADJUSTABLE DOWNLIGHT

GRIDS

HOUSING

PRODUCT SERIES	CEILING APPEARANCE	LAMP	FUNCTION	HOUSING RATING	TRANSFORMER	WATTAGE RESTRICTION (PER SOCKET)	VOLTAGE
E3R ELEMENT 3" ROUND	RF REMODEL	-H HALOGEN MR16	A ADJUSTABLE	N NON-IC AIRTIGHT	E ELECTRONIC	NONE (LEAVE BLANK)	120 VOLT (LEAVE BLANK)
E3S ELEMENT 3" SQUARE					M MAGNETIC N NO LOAD ELECTRONIC	-WR WATTAGE RESTRICTION*	277 277 VOLT
	RF	-H	A	N			

TRIMS ARE REQUIRED AND MUST BE ORDERED SEPARATELY.

*TO INCLUDE WATTAGE RESTRICTION LABEL, SPECIFY -WR AT THE END OF THE HOUSING ITEM NUMBER AND SPECIFY WATTAGE (EXAMPLE: -WR37).

TRIM

PRODUCT SERIES	CEILING APPEARANCE	TRIM STYLE	APERTURE	FINISH
E3R ELEMENT 3" ROUND	R REMODEL	B BEVEL	-O NO LENS	Z ANTIQUE BRONZE
E3S ELEMENT 3" SQUARE		F FLAT	-H SHOWER -L LENSED	B BLACK S SATIN NICKEL W WHITE
	R		-	

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

ELEMENT
by Tech Lighting[®]

GENERATION BRANDS
7400 Linder Avenue, Skokie, Illinois 60077
T 847.410.4400 F 847.410.4500



© 2017 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.