


VERSE™ 3" LED


SLOPED CEILING DOWNLIGHTS

The VERSE 3" LED Sloped Ceiling Fixed Downlight offers a cost-effective alternative for residential, multifamily and hospitality applications without sacrificing aesthetics or quality. VERSE is IC-rated and provides a minimal profile without the need for a large housing. The LED subassembly and driver ship integrated with the housing which eliminates a second wiring step after the ceiling is installed.

- 879 lumens
- 2700K and 3000K; 90+ CRI
- Easy installation
- Light source is integrated as part of the housing
- One housing for round and square trim options
- 5.2" tall housing fits into shallow plenums
- Collar notches assist in the alignment of multiple housings
- IC-rated, airtight, wet-rated
- Patent pending
- Sold as a 2-Pack



ROUND

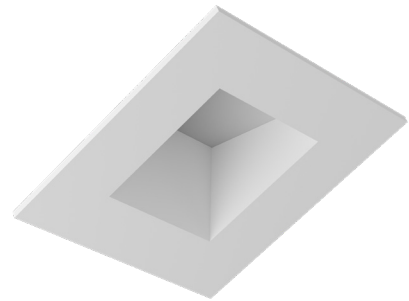

SQUARE

SPECIFICATIONS

	SLOPED FIXED	
	2700K	3000K
DELIVERED LUMENS	835	879
WATTS	9W	
EFFICACY	93	97
CRI	90+	
COLOR CONSISTENCY	3-step	
VOLTAGE	120V	
DIMMING ¹	Reverse phase, Forward phase, and TRIAC dimming down to 2% to 4% with several dimmers	
POWER SUPPLY	Constant current driver with +.9 power factor and +80% efficiency	
OPTICS	Diffused lens provides 60° beam spread	
CEILING APPEARANCE	Flanged up to 3/4" ceiling thickness	
CEILING APERTURE	4" ceiling cutout 2" aperture	
HOUSING	IC Airtight; suitable up to R60 spray foam insulation	
CONSTRUCTION	Housing: Galvanized Steel Trims: Die-Cast Aluminum	
FINISH	White (field paintable)	
GENERAL LISTINGS	ETL listed. Wet-rated.	
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Can be used to comply with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019).	
L70	50,000 hours min	
WARRANTY ²	5 years	

Ordering grids available on page 2.

¹See ELEMENT-Lighting.com for dimmer compatibility.

²Visit ELEMENT-Lighting.com for specific warranty limitations and details.

VERSE™ 3" LED

SLOPED CEILING DOWNLIGHTS

ORDERING INFORMATION

HOUSING

ITEM NUMBER	DESCRIPTION
V3R27S	VERSE 3" SLOPED HOUSING 2700K 2-PACK
V3R30S	VERSE 3" SLOPED HOUSING 3000K 2-PACK

Trims are required and must be ordered separately.
 All housings are IC-rated, airtight, and wet-rated.
 All modules are 120V.


TRIM

ITEM NUMBER	DESCRIPTION
V3RDSWH	VERSE 3" ROUND SLOPED FIXED 2-PACK
V3SDSWH	VERSE 3" SQUARE SLOPED FIXED 2-PACK


All trims are flanged white.

TRIMS

FIXED

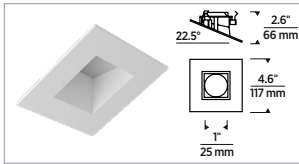


SQUARE FLANGED

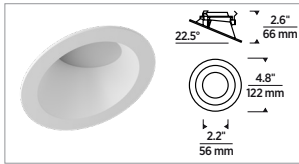

ROUND FLANGED

HOUSING

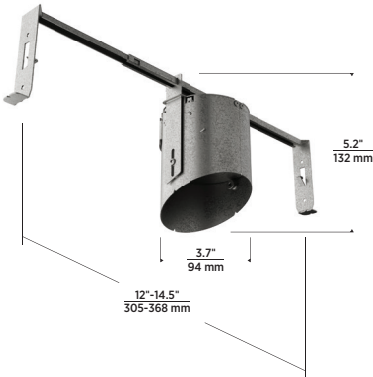

IC AIRTIGHT

Verse Sloped Ceiling is optimized for a 22.5° slope or 5:12 pitch however it will work with a broad range of ceiling pitches.

VERSE™ 3" LED

SLOPED CEILING DOWNLIGHTS

PHOTOMETRICS

Description: 3" LED Downlight
3000K

Model: Verse 9W Sloped



Input Power (Watts): 8.85

Input Power Factor: 0.99

Absolute Luminous Flux (Lumens): 855

Lumen Efficacy (Lumens per Watt): 96.9

ANGLE	0°	45°	90°
0°	606	606	606
5°	595	595	598
10°	571	571	583
15°	521	529	552
20°	464	475	510
25°	376	397	455
30°	263	298	385
35°	159	197	302
40°	87	118	216
45°	49	69	145
50°	26	41	96
55°	11	23	65
60°	4	11	45
65°	1	5	30
70°	0	2	19
75°	0	0	12
80°	0	0	7
85°	0	0	3
90°	0	0	0

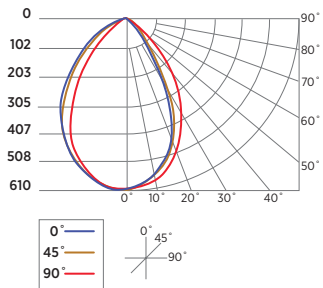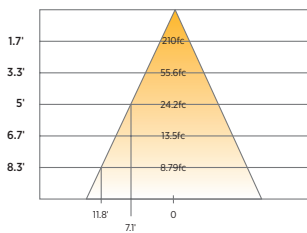

VERSE™ 3" LED

SLOPED CEILING DOWNLIGHTS

PROJECT INFORMATION

JOB NAME AND INFORMATION

FIXTURE TYPE AND QUANTITY

NOTES
